

TECHNICAL DATA SHEET

RILSAMID® AESNO TL

POLYAMIDE 12 PELLET

RILSAMID® AESNO TL is a rigid polyamide 12. This natural grade is designed for tube extrusion.

Designation : ISO 16396 - PA12, EG1HL, C22-010

TYPE

PA12

MAIN APPLICATIONS

- Cables Antitermites
- Cable
- Compounding
- Hoses & Tubes - Pneumatics
- Hoses & Tubes
- Industry - Distribution

DELIVERY FORM

- Pellets

TRANSFORMATION PROCESSES

- Extrusion - General
- Sheet Extrusion
- Tube Extrusion

ADDITIVES

- Heat Stabilized
- Light Stabilized

RHEOLOGICAL PROPERTIES

PROPERTIES	VALUE	UNIT	TEST STANDARD
Melt volume flow rate (MVR), 235°C / 5 kg (455°F / 11 lb)	8	cm³/10min	ISO 1133

MECHANICAL PROPERTIES

PROPERTIES	DRY / COND VALUE*	UNIT	TEST STANDARD
Flexural modulus, 23°C (73°F)	- / 1230	MPa	ISO 178
Tensile modulus, 23°C (73°F)	1500 / 1440	MPa	ISO 527-1/-2
Yield stress, 23°C (73°F)	50 / 43	MPa	ISO 527-1/-2
Yield strain, 23°C (73°F)	5 / 5	%	ISO 527-1/-2
Nominal strain at break, 23°C (73°F)	> 50 / > 50	%	ISO 527-1/-2
Charpy unnotched impact strength, 23°C (73°F)	- / No break		ISO 179 1eU
Charpy unnotched impact strength, -30°C (-22°F)	- / No break		ISO 179 1eU
Charpy notched impact strength, 23°C (73°F)	- / 11	kJ/m2	ISO 179 1eA
Charpy notched impact strength, -30°C (-22°F)	- / 6	kJ/m2	ISO 179 1eA
Stress at break, 23°C (73°F)	- / 47	MPa	ISO 527-1/-2

*DRY: Dry As Molded (DAM) if pellet / Dry if powder.
COND: Conditionned.

RILSAMID® AESNO TL

THERMAL PROPERTIES

PROPERTIES	VALUE	UNIT	TEST STANDARD
Melting temperature, 10°C/min	180	°C	ISO 11357-1/-3
Heat deflection temperature, 0.45 MPa	135	°C	ISO 75-1/-2
Heat deflection temperature, 1.8 MPa	55	°C	ISO 75-1/-2
Vicat softening temperature, 50N at 50°C/h	142	°C	ISO 306
Burning behavior, tested thickness 1,5 mm	HB		IEC 60695-11-10
Burning behavior, minimum thickness 3.0 mm	HB		IEC 60695-11-10
Yellow card available	YES		

ELECTRICAL PROPERTIES

PROPERTIES	DRY / COND VALUE*	UNIT	TEST STANDARD
Surface resistivity, 23°C (73,4°F)	- / 1.0E+14	ohm/sq	IEC 62631-3-2
Volumic (transversal) resistivity, 23°C (73,4°F)	- / 1.0E+12	ohm.m	IEC 62631-3-1
Comparative tracking index, 23°C (73,4°F)	- / 600		IEC 60112
Dielectric Strength, 23°C (73,4°F)	- / 30	kV/mm	IEC 60243-1

*DRY: Dry As Molded (DAM) if pellet / Dry if powder.
COND: Conditionned.

OTHER PROPERTIES

PROPERTIES	VALUE	UNIT	TEST STANDARD
Water absorption, 23°C(73°F), immersion, equilibrium	1.6	%	ISO 62
Density, 23°C (73°F)	1.01	g/cm³	ISO 1183-1

PACKAGING

Available packaging:

- 25 kg / 55 lb bags

SHELF LIFE



Two years from the date of delivery, when stored properly (sealed bags, appropriate moisture, UV protection and temperature). For any use above this limit, please refer to our technical services.

PROCESSING CONDITIONS:

- Typical melt temperature (Min / Recommended / Max) - Injection Molding: 230°C / 250°C / 270°C (445°F / 480°F / 520°F)
- Drying time and temperature: 80-90°C (175-195°F) / 4-6 hours

RILSAMID® AESNO TL

DIAGRAMS

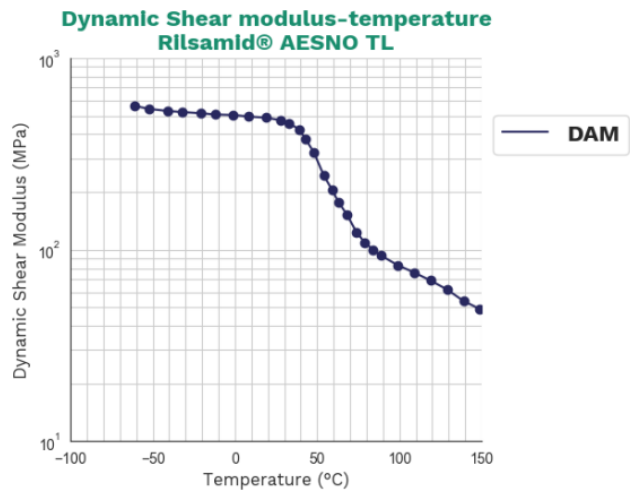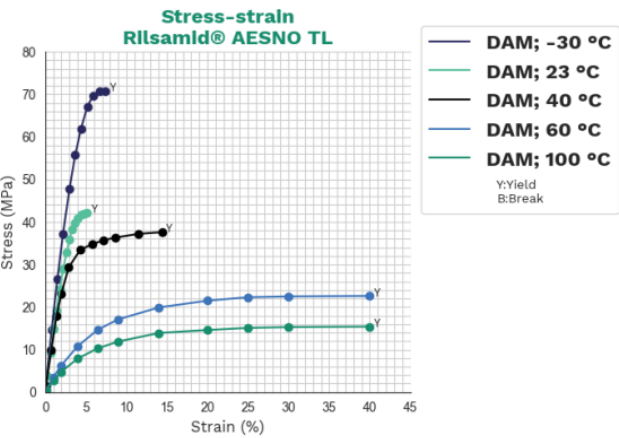

Headquarters: Arkema France
51, Esplanade du Général de Gaulle
92800 Puteaux – France
T +33 (0)1 49 00 80 80

Disclaimer - Please consult Arkema's disclaimer regarding the use of Arkema's products on <https://www.arkema.com/global/en/products/product-safety/disclaimer/> which is incorporated herein by reference and made a part hereof.
Arkema France, a French société anonyme registered at the Trade and Companies Register of Nanterre under the number 319 632 790
arkema.com

