

TECHNICAL DATA SHEET

RILSAMID® AESNO P201 TL

POLYAMIDE 12 PELLET

RILSAMID® AESNO P201 TL is a polyamide 12 compound. This natural plasticized & impact-modified grade is designed for tube extrusion, including air brake tubing (PHLY).

Designation : ISO 16396 - PA12-IP, EG1HL, C22-007

DESIGNATION

PA12-IP

MAIN APPLICATIONS

- Hoses & Tubes
- Auto - Others Extrusion
- Auto - Gasoline Lines
- Heavy Truck - Air Brake Lines

DELIVERY FORM

- Pellets

TRANSFORMATION PROCESSES

- Extrusion - General
- Tube Extrusion

ADDITIVES

- Heat Stabilized
- Light Stabilized
- Plasticizer

RHEOLOGICAL PROPERTIES

PROPERTIES	VALUE	TEST STANDARD
Melt volume flow rate (MVR), 235°C / 5 kg (455°F / 11 lb)	5 cm ³ /10min	ISO 1133

MECHANICAL PROPERTIES

PROPERTIES	DRY / COND VALUE*	TEST STANDARD
Hardness, Shore D, 15 s	- / 62	ISO 868
Charpy unnotched impact strength, 23°C (73°F)	- / No Break	ISO 179 1eU
Charpy unnotched impact strength, -30°C (-22°F)	- / No Break	ISO 179 1eU
Nominal strain at break, 23°C (73°F), 50 mm/min	- / > 50 %	ISO 527-1/-2
Yield strain, 23°C (73°F), 50 mm/min	- / 28 %	ISO 527-1/-2
Yield stress, 23°C (73°F), 50 mm/min	- / 27 MPa	ISO 527-1/-2
Tensile modulus, 23°C (73°F), 1 mm/min	580 / 580 MPa	ISO 527-1/-2
Charpy notched impact strength, -30°C (-22°F)	- / 8 kJ/m ²	ISO 179 1eA
Flexural modulus, 23°C (73°F)	- / 415 MPa	ISO 178
Charpy notched impact strength, 23°C (73°F)	No Break / No Break	ISO 179 1eA

*DRY: Dry As Molded (DAM) if pellet / Dry if powder.
COND: Conditioned.

THERMAL PROPERTIES

PROPERTIES	VALUE	TEST STANDARD
Melting temperature, 10°C/min	176 °C	ISO 11357-1/-3

RILSAMID® AESNO P201 TL

OTHER PROPERTIES

PROPERTIES	VALUE	TEST STANDARD
Specific gravity, 23°C (73°F)	1.01 g/cm ³	ISO 1183-1

PACKAGING

This grade is delivered dried in sealed packaging ready to be processed. Available packaging:

- 20 kg / 44 lb bags
- 25 kg / 55 lb bags


SHELF LIFE

Two years from the date of delivery, when stored properly (sealed bags, appropriate moisture, UV protection and temperature). For any use above this limit, please refer to our technical services.

PROCESSING CONDITIONS:

- Typical melt temperature (Min / Recommended / Max) - Injection Molding: 230°C / 250°C / 270°C (445°F / 480°F / 520°F)
- Typical mold temperature - Injection molding: 20-60°C (70-140°F)
- Drying time and temperature: 80-90°C (175-195°F) / 4-6 hours

DIAGRAMS

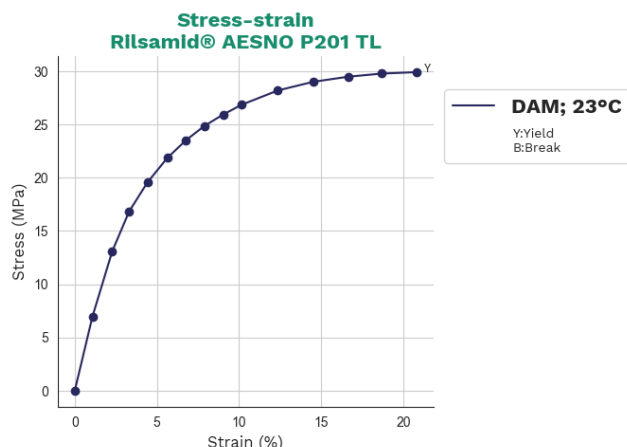

Headquarter: Arkema France
420, rue d'Estienne d'Orves
92705 Colombes Cedex – France
T +33 (0)1 49 00 80 80

Disclaimer - Please consult Arkema's disclaimer regarding the use of Arkema's products on <https://www.arkema.com/global/en/products/product-safety/disclaimer/> which is incorporated herein by reference and made a part hereof.
Arkema France, a French société anonyme registered at the Trade and Companies Register of Nanterre under the number 319 632 790

ARKEMA