

## TECHNICAL DATA SHEET

# RILSAMID® AMNO TLD

## POLYAMIDE 12 PELLET

RILSAMID® AMNO TLD is a polyamide 12 compound. This natural grade is designed for injection molding.

**Designation :** ISO 16396 - PA12, M1G1HLR, C12-010

### DESIGNATION

PA12

### MAIN APPLICATIONS

- Compounding
- Industry - Others
- Industry - Distribution
- Auto - Fluid Connectors
- Auto - Others Injection

### DELIVERY FORM

- Pellets

### TRANSFORMATION PROCESSES

- Injection Molding

### ADDITIVES

- Heat Stabilized
- Light Stabilized
- Release agent

## RHEOLOGICAL PROPERTIES

PROPERTIES	VALUE	TEST STANDARD
Melt volume flow rate (MVR), 235°C / 2.16 kg (455°F / 4.4 lb)	57 cm <sup>3</sup> /10min	ISO 1133
Shrinkage, Parallel (t+24h)	1.2 %	ISO 294-4
Shrinkage, Normal (t+24h)	1.4 %	ISO 294-4

## MECHANICAL PROPERTIES

PROPERTIES	DRY / COND VALUE*	TEST STANDARD
Charpy unnotched impact strength, 23°C (73°F)	- / No Break	ISO 179 1eU
Charpy unnotched impact strength, -30°C (-22°F)	- / No Break	ISO 179 1eU
Nominal strain at break, 23°C (73°F), 50 mm/min	> 50 / > 50 %	ISO 527-1/-2
Yield strain, 23°C (73°F), 50 mm/min	7 / 7 %	ISO 527-1/-2
Yield stress, 23°C (73°F), 50 mm/min	42 / 38 MPa	ISO 527-1/-2
Tensile modulus, 23°C (73°F), 1 mm/min	1450 / 1170 MPa	ISO 527-1/-2
Charpy notched impact strength, 23°C (73°F)	- / 9 kJ/m <sup>2</sup>	ISO 179 1eA
Charpy notched impact strength, -30°C (-22°F)	- / 5 kJ/m <sup>2</sup>	ISO 179 1eA

\*DRY: Dry As Molded (DAM) if pellet / Dry if powder.  
COND: Conditioned.

# RILSAMID® AMNO TLD

## THERMAL PROPERTIES

PROPERTIES	VALUE	TEST STANDARD
Vicat softening temperature, 50N at 50°C/h	142 °C	ISO 306
Yellow card available	yes	
Heat deflection temperature, 0.45 MPa	135 °C	ISO 75-1/-2
Heat deflection temperature, 1.8 MPa	55 °C	ISO 75-1/-2
Melting temperature, 10°C/min	178 °C	ISO 11357-1/-3

## ELECTRICAL PROPERTIES

PROPERTIES	DRY / COND VALUE*	TEST STANDARD
Surface resistivity, 23°C (73,4°F)	- / 1.0E+14 ohm/sq	IEC 62631-3-2
Volumic (transversal) resistivity, 23°C (73,4°F)	- / 1.0E+12 ohm/m	IEC 62631-3-1
Comparative tracking index, 23°C (73,4°F)	- / 600	IEC 60112
Dielectric stress, 23°C (73,4°F)	- / 30	IEC 60243-1
Relative permittivity, 100Hz	- / 4	IEC 60250
Relative permittivity, 1Mhz	- / 3	IEC 60250
Dissipation factor, 100Hz	- / 779	IEC 60250
Dissipation factor, 1Mhz	- / 779	IEC 60250

\*DRY: Dry As Molded (DAM) if pellet / Dry if powder.  
COND: Conditioned.

## OTHER PROPERTIES

PROPERTIES	VALUE	TEST STANDARD
Moisture absorption, At equilibrium at 23°C (73°F) / 50%HR	0.7 %	ISO 62
Water absorption, 23°C (73°F), immersion, equilibrium	1.8 %	ISO 62
Specific gravity, 23°C (73°F)	1.02 g/cm <sup>3</sup>	ISO 1183-1

## PACKAGING

This grade is delivered dried in sealed packaging ready to be processed. Available packaging:

- 25 kg / 55 lb bags

## SHELF LIFE



Two years from the date of delivery, when stored properly (sealed bags, appropriate moisture, UV protection and temperature). For any use above this limit, please refer to our technical services.

## PROCESSING CONDITIONS:

- Typical melt temperature (Min / Recommended / Max) - Injection Molding: 210°C / 230°C / 260°C (410°F / 445°F / 500°F)
- Typical mold temperature - Injection molding: 20-60°C (70-140°F)
- Drying time and temperature: 80-90°C (175-195°F) / 4-6 hours

# RILSAMID® AMNO TLD

## DIAGRAMS

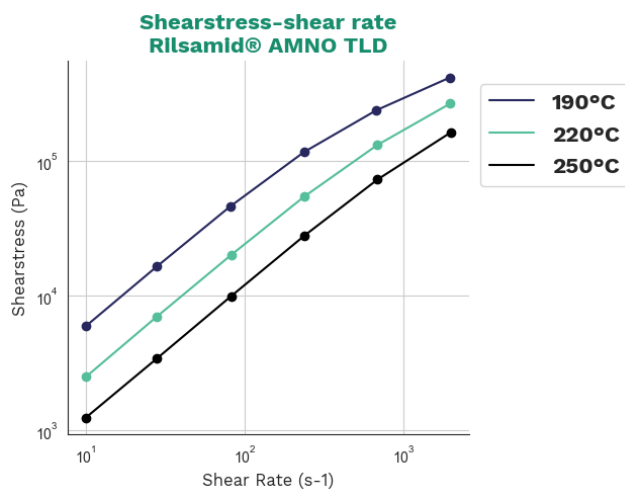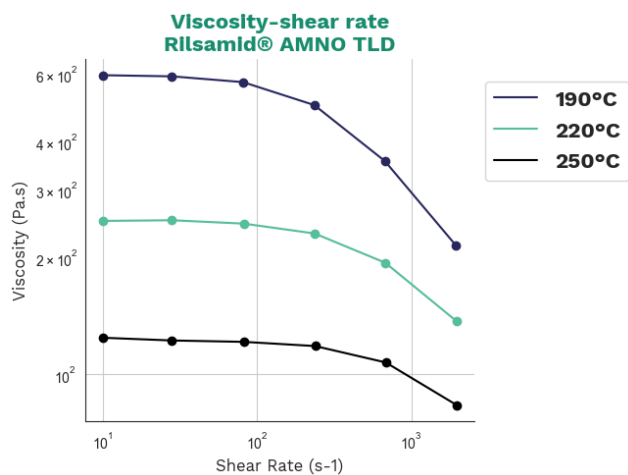

**Headquarter: Arkema France**  
 420, rue d'Estienne d'Orves  
 92705 Colombes Cedex – France  
 T +33 (0)1 49 00 80 80

Disclaimer - Please consult Arkema's disclaimer regarding the use of Arkema's products on <https://www.arkema.com/global/en/products/product-safety/disclaimer/> which is incorporated herein by reference and made a part hereof.  
 Arkema France, a French société anonyme registered at the Trade and Companies Register of Nanterre under the number 319 632 790

**ARKEMA**