

## TECHNICAL DATA SHEET

# RILSAN® BESN G9 TL

## POLYAMIDE 11 PELLET

RILSAN® BESN G9 TL is a polyamide 11 compound. It is produced from a renewable & sustainable source (castor oil). This black grade with improved friction properties is designed for tube extrusion.

**Designation :** ISO 16396 - PA11, CDx, EG1HLS, C22-020

### DESIGNATION

PA11

### MAIN APPLICATIONS

- Hoses & Tubes
- Industry - Distribution
- Auto - Others Extrusion
- Auto - Others Injection

### DELIVERY FORM

- Pellets

### TRANSFORMATION PROCESSES

- Extrusion - General
- Tube Extrusion

### ADDITIVES

- Heat Stabilized
- Light Stabilized
- Lubricants

## RHEOLOGICAL PROPERTIES

PROPERTIES	VALUE	TEST STANDARD
Melt volume flow rate (MVR), 235°C / 2.16 kg (455°F / 4.4 lb)	1 cm <sup>3</sup> /10min	ISO 1133

## MECHANICAL PROPERTIES

PROPERTIES	DRY / COND VALUE*	TEST STANDARD
Hardness, Shore D, 15 s	- / 71	ISO 868
Charpy unnotched impact strength, 23°C (73°F)	No Break / No Break	ISO 179 1eU
Charpy unnotched impact strength, -30°C (-22°F)	- / No Break	ISO 179 1eU
Nominal strain at break, 23°C (73°F), 50 mm/min	- / > 50 %	ISO 527-1/-2
Yield strain, 23°C (73°F), 50 mm/min	- / 5 %	ISO 527-1/-2
Yield stress, 23°C (73°F), 50 mm/min	46 / 46 MPa	ISO 527-1/-2
Tensile modulus, 23°C (73°F), 1 mm/min	2130 / 2130 MPa	ISO 527-1/-2
Charpy notched impact strength, 23°C (73°F)	- / 7 kJ/m <sup>2</sup>	ISO 179 1eA
Charpy notched impact strength, -30°C (-22°F)	- / 6 kJ/m <sup>2</sup>	ISO 179 1eA
Flexural modulus, 23°C (73°F)	- / 1790 MPa	ISO 178

\*DRY: Dry As Molded (DAM) if pellet / Dry if powder.  
COND: Conditioned.

# RILSAN® BESN G9 TL

## THERMAL PROPERTIES

PROPERTIES	VALUE	TEST STANDARD
Vicat softening temperature, 50N at 50°C/h	162 °C	ISO 306
Heat deflection temperature, 0.45 MPa	168 °C	ISO 75-1/-2
Heat deflection temperature, 1.8 MPa	56 °C	ISO 75-1/-2
Melting temperature, 10°C/min	186 °C	ISO 11357-1/-3

## ELECTRICAL PROPERTIES

PROPERTIES	DRY / COND VALUE*	TEST STANDARD
Surface resistivity, 23°C (73,4°F)	- / 6.0E+13 ohm/sq	IEC 62631-3-2
Volumic (transversal) resistivity, 23°C (73,4°F)	- / 5.0E+11 ohm/m	IEC 62631-3-1
Comparative tracking index, 23°C (73,4°F)	- / 600	IEC 60112
Dielectric stress, 23°C (73,4°F)	- / 55	IEC 60243-1

\*DRY: Dry As Molded (DAM) if pellet / Dry if powder.  
COND: Conditionned.

## OTHER PROPERTIES

PROPERTIES	VALUE	TEST STANDARD
Water absorption, 23°C (73°F), immersion, equilibrium	1.7 %	ISO 62
Specific gravity, 23°C (73°F)	1.09 g/cm <sup>3</sup>	ISO 1183-1

## PACKAGING

This grade is delivered dried in sealed packaging ready to be processed. Available packaging:

- 25 kg / 55 lb bags

## SHELF LIFE

Two years from the date of delivery, when stored properly (sealed bags, appropriate moisture, UV protection and temperature). For any use above this limit, please refer to our technical services.

## PROCESSING CONDITIONS:



- Typical melt temperature (Min / Recommended / Max) - Injection Molding: 230°C / 250°C / 270°C (445°F / 480°F / 520°F)
- Typical mold temperature - Injection molding: 20-60°C (70-140°F)
- Drying time and temperature: 80-90°C (175-195°F) / 4-6 hours

## SPECIAL CHARACTERISTICS

- Bio-based
- Low oligomers

# RILSAN® BESN G9 TL

## DIAGRAMS

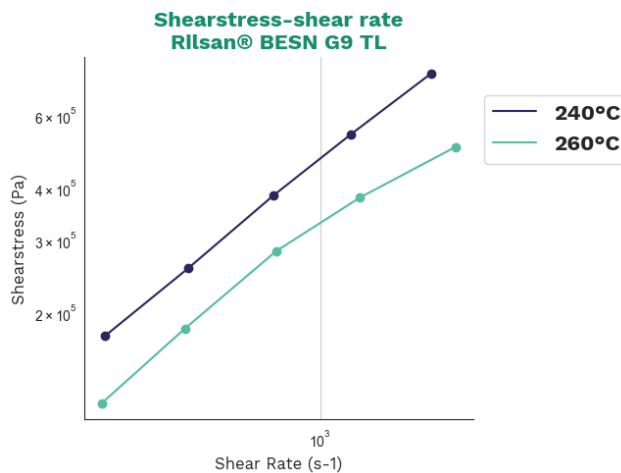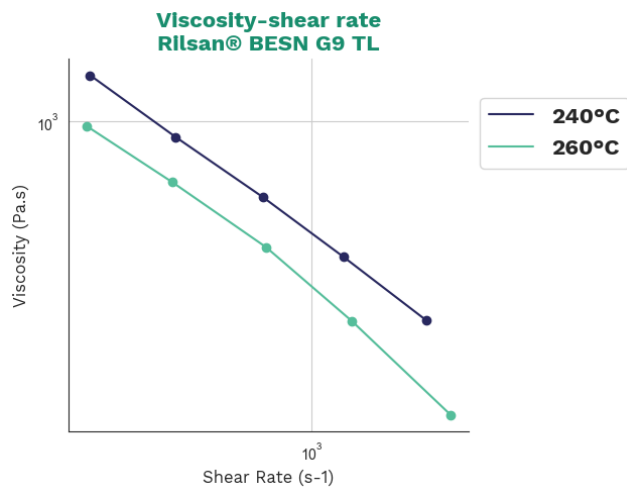

**Headquarter: Arkema France**  
420, rue d'Estienne d'Orves  
92705 Colombes Cedex – France  
T +33 (0)1 49 00 80 80

Disclaimer - Please consult Arkema's disclaimer regarding the use of Arkema's products on <https://www.arkema.com/global/en/products/product-safety/disclaimer/> which is incorporated herein by reference and made a part hereof.  
Arkema France, a French société anonyme registered at the Trade and Companies Register of Nanterre under the number 319 632 790