

TECHNICAL DATA SHEET

RILSAN® BESNO P20 TLO

POLYAMIDE 11 PELLET

RILSAN® BESNO P20 TLO is a polyamide 11 compound. It is produced from a renewable & sustainable source (castor oil). This natural plasticized grade is designed for tube extrusion, with a particularly low amount of oligomers.

Designation : ISO 16396 - PA11-P, EG1HL, C22-005

DESIGNATION

PA11-P

MAIN APPLICATIONS

- Auto - Gasoline Lines

DELIVERY FORM

- Pellets

TRANSFORMATION PROCESSES

- Extrusion - General
- Tube Extrusion

ADDITIVES

- Heat Stabilized
- Light Stabilized
- Plasticizer

RHEOLOGICAL PROPERTIES

プロパティ	価値	テスト基準
Melt volume flow rate (MVR), 235°C / 5 kg (455°F / 11 lb)	2 cm ³ /10min	ISO 1133

MECHANICAL PROPERTIES

プロパティ	DRY / COND VALUE*	テスト基準
Hardness, Shore D, 15 s	- / 63	ISO 868
Charpy unnotched impact strength, 23°C (73°F)	- / No Break	ISO 179 1eU
Charpy unnotched impact strength, -30°C (-22°F)	- / No Break	ISO 179 1eU
Nominal strain at break, 23°C (73°F), 50 mm/min	- / > 50 %	ISO 527-1/-2
Yield strain, 23°C (73°F), 50 mm/min	- / 39 %	ISO 527-1/-2
Yield stress, 23°C (73°F), 50 mm/min	29 / 29 MPa	ISO 527-1/-2
Tensile modulus, 23°C (73°F), 1 mm/min	510 / 510 MPa	ISO 527-1/-2
Charpy notched impact strength, 23°C (73°F)	No Break / No Break	ISO 179 1eA
Charpy notched impact strength, -30°C (-22°F)	- / 10 kJ/m ²	ISO 179 1eA
Flexural modulus, 23°C (73°F)	- / 380 MPa	ISO 178

*DRY: Dry As Molded (DAM) if pellet / Dry if powder.
COND: Conditionned.

RILSAN® BESNO P20 TLO

THERMAL PROPERTIES

プロパティ	価値	テスト基準
Melting temperature, 10°C/min	182 °C	ISO 11357-1/-3

OTHER PROPERTIES

プロパティ	価値	テスト基準
Water absorption, 23°C(73°F), immersion, equilibrium	1.8 %	ISO 62
Specific gravity, 23°C (73°F)	1.04 g/cm ³	ISO 1183-1

包装

This grade is delivered dried in sealed packaging ready to be processed. Available packaging:

- 25 kg / 55 lb bags

賞味期限

Two years from the date of delivery, when stored properly (sealed bags, appropriate moisture, UV protection and temperature). For any use above this limit, please refer to our technical services.



PROCESSING CONDITIONS:

- 典型的な熔融温度 (最小 / 推奨 / 最大) - 射出成形: 230°C / 250°C / 270°C (445°F / 480°F / 520°F)
- 典型的な金型温度 - 射出成形: 20-60°C (70-140°F)
- Drying time and temperature: 80-90°C (175-195°F) / 4-6 hours




SPECIAL CHARACTERISTICS

- Bio-based
- Low oligomers

DIAGRAMS

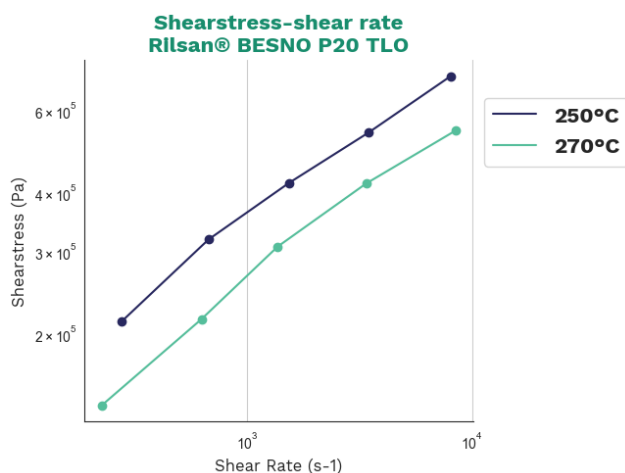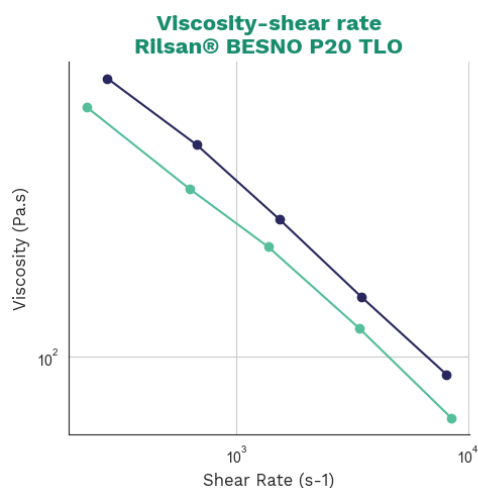

RILSAN® BESNO P20 TLO

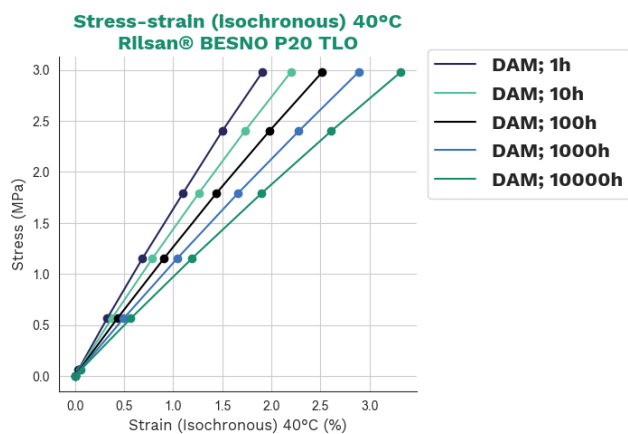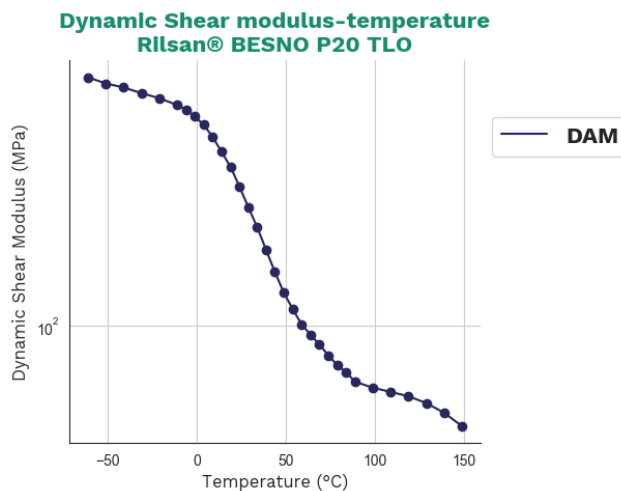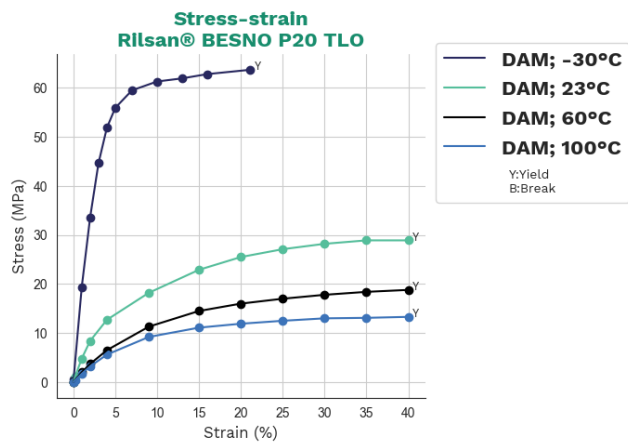

Headquarter: Arkema France
 420, rue d'Estienne d'Orves
 92705 Colombes Cedex – France
 T +33 (0)1 49 00 80 80

Disclaimer - Please consult Arkema's disclaimer regarding the use of Arkema's products on <https://www.arkema.com/global/en/products/product-safety/disclaimer/> which is incorporated herein by reference and made a part hereof.
 Arkema France, a French société anonyme registered at the Trade and Companies Register of Nanterre under the number 319 632 790

arkema.com

ARKEMA