

TECHNICAL DATA SHEET RILSAN® BESNO TL

POLYAMIDE 11 PELLET

RILSAN® BESNO TL is a polyamide 11 compound. It is produced from a renewable & sustainable source (castor oil). This natural grade is designed for tube extrusion.

Designation : ISO 16396 - PA11, EG1HL, C22-010

DESIGNATION

PA11

MAIN APPLICATIONS

- Winter Sports - Ski
- Film And Membrane - Others
- Yarn - Multifilament - Growth
- Footwear - Insole/Midsole/Foam
- Outdoor - Equipment/Bicycle/Racket
- Outdoor - Apparel
- Downstream - Natural Gas Fittings
- Performance Wire
- CPI - Others
- Compounding
- Monofilament
- Hoses & Tubes - Pneumatics
- Industry - Distribution
- Other Transportation
- Auto - Others Extrusion
- Auto - Metal Tube Coating
- Heavy Truck H2 & Gas Lines And Tanks
- Heavy Truck - Air Brake Lines

DELIVERY FORM

- Pellets

TRANSFORMATION PROCESSES

- Extrusion - General
- Sheet Extrusion
- Tube Extrusion

ADDITIVES

- Heat Stabilized
- Light Stabilized

RHEOLOGICAL PROPERTIES

プロパティ	価値	テスト基準
Melt volume flow rate (MVR), 235°C / 2.16 kg (455°F / 4.4 lb)	1 cm ³ /10min	ISO 1133

RILSAN® BESNO TL

MECHANICAL PROPERTIES

プロパティ	DRY / COND VALUE*	テスト基準
Hardness, Shore D, 15 s	- / 72	ISO 868
Charpy unnotched impact strength, 23°C (73°F)	- / No Break	ISO 179 1eU
Charpy unnotched impact strength, -30°C (-22°F)	- / No Break	ISO 179 1eU
Nominal strain at break, 23°C (73°F), 50 mm/min	- / > 50 %	ISO 527-1/-2
Yield strain, 23°C (73°F), 50 mm/min	- / 5 %	ISO 527-1/-2
Yield stress, 23°C (73°F), 50 mm/min	- / 38 MPa	ISO 527-1/-2
Tensile modulus, 23°C (73°F), 1 mm/min	- / 1280 MPa	ISO 527-1/-2
Charpy notched impact strength, 23°C (73°F)	- / 11 kJ/m ²	ISO 179 1eA
Charpy notched impact strength, -30°C (-22°F)	- / 12 kJ/m ²	ISO 179 1eA
Flexural modulus, 23°C (73°F)	- / 1085 MPa	ISO 178

*DRY: Dry As Molded (DAM) if pellet / Dry if powder.
COND: Conditionned.

THERMAL PROPERTIES

プロパティ	価値	テスト基準
Vicat softening temperature, 50N at 50°C/h	160 °C	ISO 306
Yellow card available	yes	
Heat deflection temperature, 0.45 MPa	145 °C	ISO 75-1/-2
Heat deflection temperature, 1.8 MPa	50 °C	ISO 75-1/-2
Melting temperature, 10°C/min	186 °C	ISO 11357-1/-3

ELECTRICAL PROPERTIES

プロパティ	DRY / COND VALUE*	テスト基準
Surface resistivity, 23°C (73,4°F)	- / 1.0E+14 ohm/sq	IEC 62631-3-2
Volumic (transversal) resistivity, 23°C (73,4°F)	- / 1.0E+12 ohm/m	IEC 62631-3-1
Dielectric stress, 23°C (73,4°F)	- / 30	IEC 60243-1
Relative permittivity, 100Hz	- / 3	IEC 60250
Relative permittivity, 1Mhz	- / 3	IEC 60250
Dissipation factor, 100Hz	- / 308	IEC 60250
Dissipation factor, 1Mhz	- / 308	IEC 60250
Comparative tracking index, 23°C (73,4°F)	- / 600	IEC 60112

*DRY: Dry As Molded (DAM) if pellet / Dry if powder.
COND: Conditionned.

RILSAN® BESNO TL

OTHER PROPERTIES

プロパティ	価値	テスト基準
Water absorption, 23°C(73°F), immersion, equilibrium	1.9 %	ISO 62
Bio-based carbon content, Measured	99 %	ASTM D6866
Specific gravity, 23°C (73°F)	1.02 g/cm ³	ISO 1183-1

包装

This grade is delivered dried in sealed packaging ready to be processed. Available packaging:

- 20 kg / 44 lb bags
- 25 kg / 55 lb bags
- 550 kg rigid containers

賞味期限

Two years from the date of delivery, when stored properly (sealed bags, appropriate moisture, UV protection and temperature). For any use above this limit, please refer to our technical services.



PROCESSING CONDITIONS:

- 典型的な溶融温度 (最小 / 推奨 / 最大) - 射出成形: 230°C / 250°C / 270°C (445°F / 480°F / 520°F)
- 典型的な金型温度 - 射出成形: 20-60°C (70-140°F)
- Drying time and temperature: 80-90°C (175-195°F) / 4-6 hours





SPECIAL CHARACTERISTICS

- Bio-based
- Low oligomers

DIAGRAMS

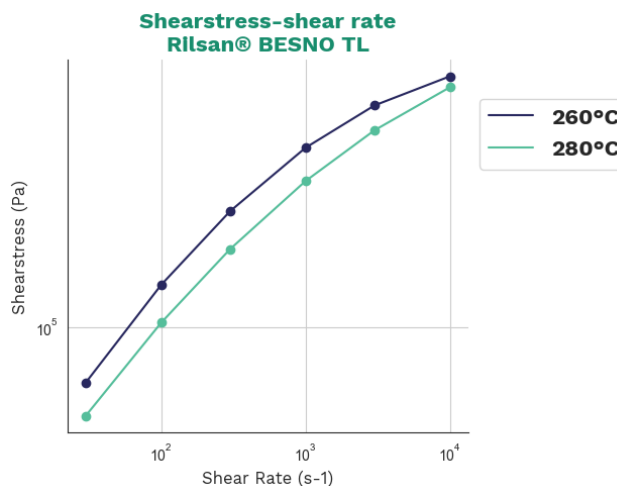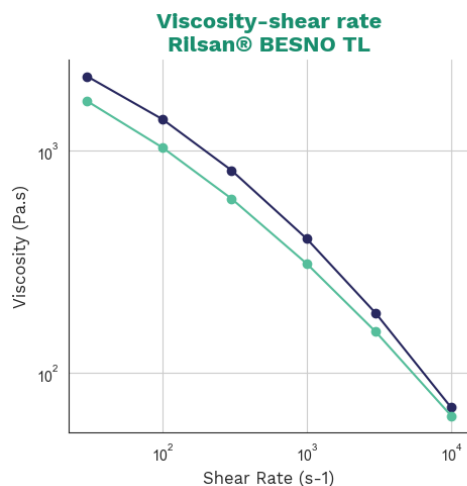

RILSAN® BESNO TL

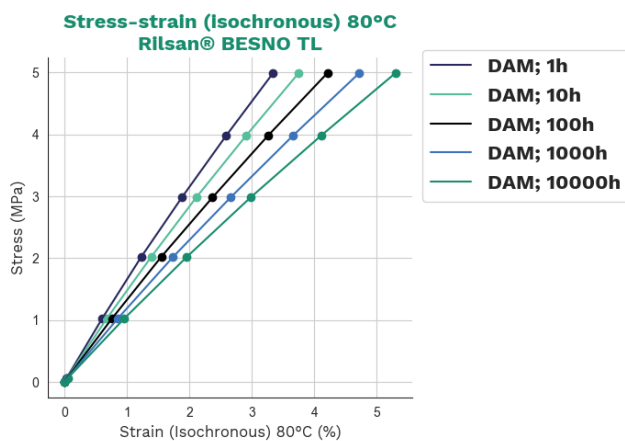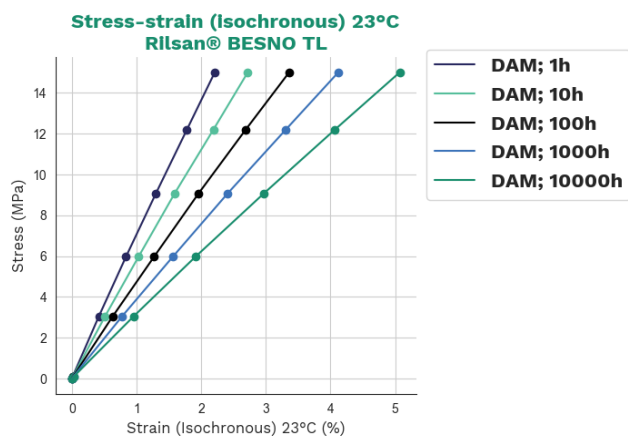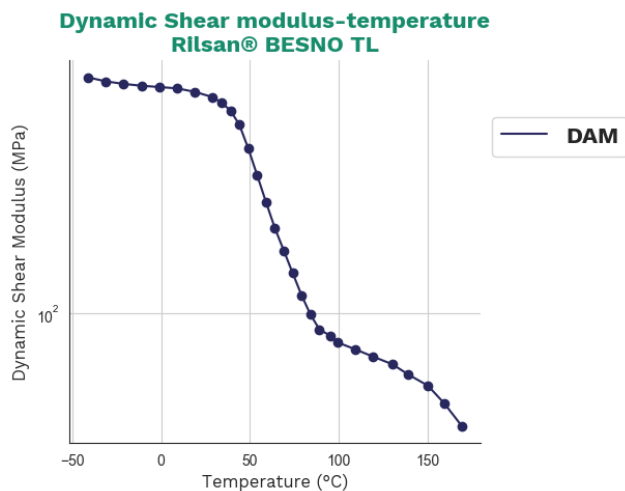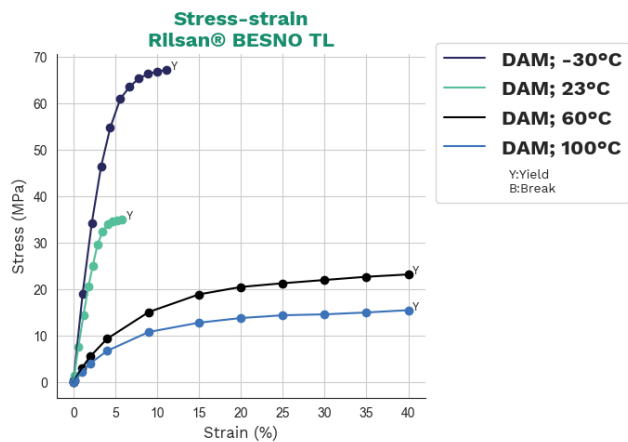

Headquarter: Arkema France
 420, rue d'Estienne d'Orves
 92705 Colombes Cedex – France
 T +33 (0)1 49 00 80 80

Disclaimer - Please consult Arkema's disclaimer regarding the use of Arkema's products on <https://www.arkema.com/global/en/products/product-safety/disclaimer/> which is incorporated herein by reference and made a part hereof.
 Arkema France, a French société anonyme registered at the Trade and Companies Register of Nanterre under the number 319 632 790