

TECHNICAL DATA SHEET

RILSAN® BZM 30 O T3L

POLYAMIDE 11 PELLET

RILSAN® BZM 30 O T3L is a polyamide 11 compound. It is produced from a renewable & sustainable source (castor oil). This natural glass fiber reinforced grade is designed for injection molding. It has a superior color stability, which makes particularly adapted to consumer applications.

Designation : ISO 16396 - PA11, GF30, M1G1HLR, C18-070

DESIGNATION

PA11-GF30

MAIN APPLICATIONS

- Footwear - Outsole/Components
- Footwear - Insole/Midsole/Foam
- Industry - Others
- Industry - Distribution
- Auto - Fluid Connectors
- Heavy Truck - Air Brake Connectors

DELIVERY FORM

- Pellets

TRANSFORMATION PROCESSES

- Injection Molding

ADDITIVES

- Heat Stabilized
- Light Stabilized

RHEOLOGICAL PROPERTIES

PROPERTIES	VALUE	TEST STANDARD
Shrinkage, Parallel (t+24h)	0.2 %	ISO 294-4
Shrinkage, Normal (t+24h)	0.8 %	ISO 294-4
Melt volume flow rate (MVR), 235°C / 5 kg (455°F / 11 lb)	4.9 cm ³ /10min	ISO 1133

MECHANICAL PROPERTIES

PROPERTIES	DRY / COND VALUE*	TEST STANDARD
Tensile modulus, 23°C (73°F), 1 mm/min	6300 / 6300 MPa	ISO 527-1/-2
Charpy unnotched impact strength, 23°C (73°F)	- / 91 kJ/m ²	ISO 179 1eU
Charpy unnotched impact strength, -30°C (-22°F)	- / 98 kJ/m ²	ISO 179 1eU
Charpy notched impact strength, 23°C (73°F)	- / 26 kJ/m ²	ISO 179 1eA
Charpy notched impact strength, -30°C (-22°F)	- / 18 kJ/m ²	ISO 179 1eA
Hardness, Shore D, 15 s	- / 78	ISO 868

*DRY: Dry As Molded (DAM) if pellet / Dry if powder.
COND: Conditionned.

THERMAL PROPERTIES

PROPERTIES	VALUE	TEST STANDARD
Melting temperature, 10°C/min	188 °C	ISO 11357-1/-3

RILSAN® BZM 30 0 T3L

OTHER PROPERTIES

PROPERTIES	VALUE	TEST STANDARD
Specific gravity, 23°C (73°F)	1.24 g/cm ³	ISO 1183-1
Moisture absorption, At equilibrium at 23°C (73°F) / 50%HR	0.5 %	ISO 62
Water absorption, 23°C (73°F), immersion, equilibrium	1.4 %	ISO 62

PACKAGING

This grade is delivered dried in sealed packaging ready to be processed. Available packaging:

- 25 kg / 55 lb bags

SHELF LIFE

Two years from the date of delivery, when stored properly (sealed bags, appropriate moisture, UV protection and temperature). For any use above this limit, please refer to our technical services.



PROCESSING CONDITIONS:

- Typical melt temperature (Min / Recommended / Max) - Injection Molding: 250°C / 270°C / 290°C (480°F / 520°F / 555°F)
- Typical mold temperature - Injection molding: 40-90°C (105-195°F)
- Drying time and temperature: 80-90°C (175-195°F) / 4-6 hours


SPECIAL CHARACTERISTICS

- Bio-based
- Low oligomers

DIAGRAMS

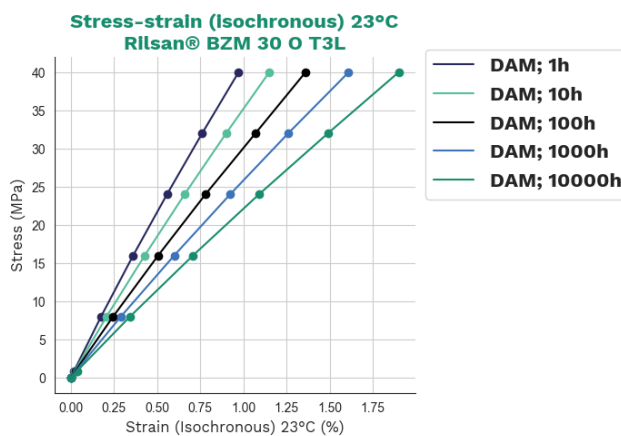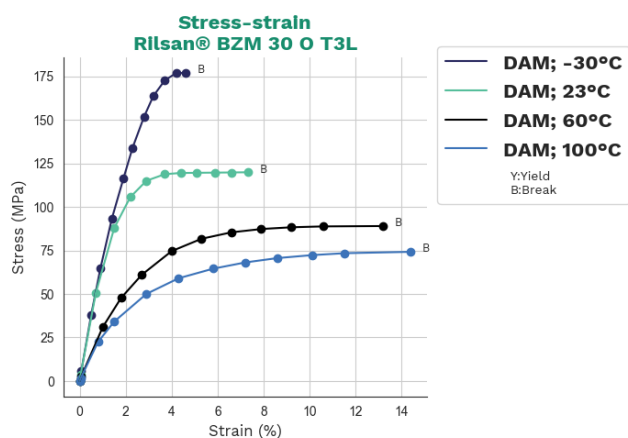

RILSAN® BZM 30 O T3L

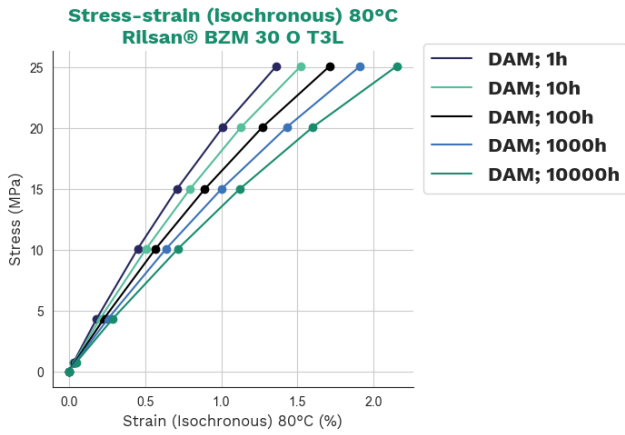

Headquarter: Arkema France
420, rue d'Estienne d'Orves
92705 Colombes Cedex – France
T +33 (0)1 49 00 80 80

Disclaimer - Please consult Arkema's disclaimer regarding the use of Arkema's products on <https://www.arkema.com/global/en/products/product-safety/disclaimer/> which is incorporated herein by reference and made a part hereof.
Arkema France, a French société anonyme registered at the Trade and Companies Register of Nanterre under the number 319 632 790

ARKEMA

arkema.com