

TECHNICAL DATA SHEET RILSAN® BZM 7 O TL

POLYAMIDE 11 PELLET

RILSAN® BZM 7 O TL is a polyamide 11 compound. It is produced from a renewable & sustainable source (castor oil). This natural glass fiber reinforced grade is designed for injection molding and is used in sport & consumer applications.

Designation : ISO 16396 - PA11, GF7, M1G1HLR, C18-030

DESIGNATION

PA11-GF7

MAIN APPLICATIONS

- Footwear - Outsole/Components
- Outdoor - Equipment - Growth
- Outdoor - Equipment/Bicycle/Racket
- Other Sport Equipment
- Industry - Distribution
- Auto - Fluid Connectors

DELIVERY FORM

- Pellets

TRANSFORMATION PROCESSES

- Injection Molding

ADDITIVES

- Heat Stabilized
- Light Stabilized

RHEOLOGICAL PROPERTIES

プロパティ	価値	テスト基準
Shrinkage, Parallel (t+24h)	1.0 %	ISO 294-4
Shrinkage, Normal (t+24h)	0.8 %	ISO 294-4
Melt volume flow rate (MVR), 235°C / 5 kg (455°F / 11 lb)	20 cm ³ /10min	ISO 1133

MECHANICAL PROPERTIES

プロパティ	DRY / COND VALUE*	テスト基準
Flexural modulus, 23°C (73°F)	- / 1500 MPa	ISO 178
Tensile modulus, 23°C (73°F), 1 mm/min	1860 / 1860 MPa	ISO 527-1/-2
Yield stress, 23°C (73°F), 50 mm/min	- / 48 MPa	ISO 527-1/-2
Yield strain, 23°C (73°F), 50 mm/min	- / 7 %	ISO 527-1/-2
Nominal strain at break, 23°C (73°F), 50 mm/min	- / 31 %	ISO 527-1/-2
Charpy notched impact strength, 23°C (73°F)	- / 22 kJ/m ²	ISO 179 1eA
Charpy notched impact strength, -30°C (-22°F)	- / 12 kJ/m ²	ISO 179 1eA
Hardness, Shore D, 15 s	- / 71	ISO 868

*DRY: Dry As Molded (DAM) if pellet / Dry if powder.
COND: Conditionned.

RILSAN® BZM 7 0 TL

THERMAL PROPERTIES

プロパティ	価値	テスト基準
Melting temperature, 10°C/min	189 °C	ISO 11357-1/-3

OTHER PROPERTIES

プロパティ	価値	テスト基準
Specific gravity, 23°C (73°F)	1.07 g/cm ³	ISO 1183-1
Bio-based carbon content, Measured	93 %	ASTM D6866

包装

This grade is delivered dried in sealed packaging ready to be processed. Available packaging:

- 25 kg / 55 lb bags

賞味期限

Two years from the date of delivery, when stored properly (sealed bags, appropriate moisture, UV protection and temperature). For any use above this limit, please refer to our technical services.


PROCESSING CONDITIONS:

- 典型的な溶融温度 (最小 / 推奨 / 最大) - 射出成形: 250°C / 270°C / 290°C (480°F / 520°F / 555°F)
- 典型的な金型温度 - 射出成形: 40-90°C (105-195°F)
- Drying time and temperature: 80-90°C (175-195°F) / 4-6 hours

SPECIAL CHARACTERISTICS

- Bio-based
- Low oligomers

DIAGRAMS

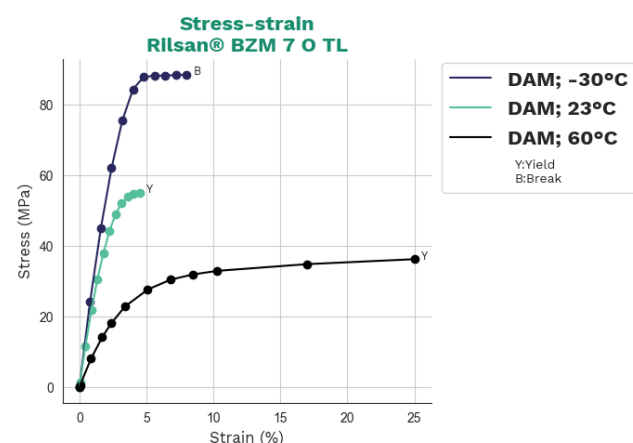

Headquarter: Arkema France
420, rue d'Estienne d'Orves
92705 Colombes Cedex – France
T +33 (0)1 49 00 80 80

Disclaimer - Please consult Arkema's disclaimer regarding the use of Arkema's products on <https://www.arkema.com/global/en/products/product-safety/disclaimer/> which is incorporated herein by reference and made a part hereof.

Arkema France, a French société anonyme registered at the Trade and Companies Register of Nanterre under the number 319 632 790

[arkema.com](https://www.arkema.com)

ARKEMA