

## TECHNICAL DATA SHEET

# RILSAN® CLEAR G170 MED

## AMORPHOUS POLYAMIDE PELLET

RILSAN® CLEAR G170 MED is a high performance transparent polyamide resin. This grade with outstanding thermal resistance is approved in medical applications. Upon request, letters regarding USP Class VI compliance can be provided.

Designation : ISO 16396 - PA, MT, C12-020

### DESIGNATION

PA\*

### DELIVERY FORM

- Pellets

### TRANSFORMATION PROCESSES

- Injection Molding

### ADDITIVES

- Heat Stabilized

## RHEOLOGICAL PROPERTIES

속성	값	테스트 표준
Shrinkage, Parallel (t+24h)	1.1 %	ISO 294-4
Shrinkage, Normal (t+24h)	1.1 %	ISO 294-4
Melt volume flow rate (MVR), 275°C / 2.16 kg (527°F / 4.4 lb)	2 cm <sup>3</sup> /10min	ISO 1133

## MECHANICAL PROPERTIES

속성	DRY / COND VALUE*	테스트 표준
Hardness, Shore D, 15 s	- / 79	ISO 868
Charpy unnotched impact strength, 23°C (73°F)	- / No Break	ISO 179 1eU
Charpy unnotched impact strength, -30°C (-22°F)	No Break / No Break	ISO 179 1eU
Nominal strain at break, 23°C (73°F), 50 mm/min	> 50 / > 50 %	ISO 527-1/-2
Yield strain, 23°C (73°F), 50 mm/min	8 / 9 %	ISO 527-1/-2
Yield stress, 23°C (73°F), 50 mm/min	76 / 74 MPa	ISO 527-1/-2
Tensile modulus, 23°C (73°F), 1 mm/min	2100 / 2020 MPa	ISO 527-1/-2
Charpy notched impact strength, 23°C (73°F)	- / 13 kJ/m <sup>2</sup>	ISO 179 1eA
Charpy notched impact strength, -30°C (-22°F)	- / 13 kJ/m <sup>2</sup>	ISO 179 1eA
Flexural modulus, 23°C (73°F)	- / 1980 MPa	ISO 178

\*DRY: Dry As Molded (DAM) if pellet / Dry if powder.  
COND: Conditionned.

# RILSAN® CLEAR G170 MED

속성	값	테스트 표준
Glass transition temperature, 10°C/min	168 °C	ISO 11357-1/-2
Vicat softening temperature, 50N at 50°C/h	160 °C	ISO 306
Heat deflection temperature, 0.45 MPa	150 °C	ISO 75-1/-2
Heat deflection temperature, 1.8 MPa	136 °C	ISO 75-1/-2

## THERMAL PROPERTIES/ELECTRICAL PROPERTIES

속성	DRY / COND VALUE*	테스트 표준
Surface resistivity, 23°C (73,4°F)	- / 1.0E+12 ohm/sq	IEC 62631-3-2
Volumic (transversal) resistivity, 23°C (73,4°F)	- / 1.0E+11 ohm/m	IEC 62631-3-1
Comparative tracking index, 23°C (73,4°F)	- / 600	IEC 60112
Dielectric stress, 23°C (73,4°F)	- / 50	IEC 60243-1

\*DRY: Dry As Molded (DAM) if pellet / Dry if powder.  
COND: Conditionned.

## OTHER PROPERTIES

속성	값	테스트 표준
Moisture absorption, At equilibrium at 23°C (73°F) / 50%HR	1.7 %	ISO 62
Water absorption, 23°C (73°F), immersion, equilibrium	3.8 %	ISO 62
Specific gravity, 23°C (73°F)	1.05 g/cm <sup>3</sup>	ISO 1183-1

## PACKAGING

This grade is delivered dried in sealed packaging ready to be processed. Available packaging:

- 26 kg / 55 lb bags

## SHELF LIFE

Two years from the date of delivery, when stored properly (sealed bags, appropriate moisture, UV protection and temperature). For any use above this limit, please refer to our technical services.

## PROCESSING CONDITIONS:

- Typical melt temperature (Min / Recommended / Max) - Injection Molding: 270°C / 290°C / 310°C (520°F / 555°F / 590°F)
- Typical mold temperature - Injection molding: 20-80°C (70-175°F)
- Drying time and temperature: 90°C (195°F) / 4-6 hours


## SPECIAL CHARACTERISTICS

- Transparent


# RILSAN® CLEAR G170 MED

## DIAGRAMS


**Viscosity-shear rate**  
Rilsan® Clear G170 MED

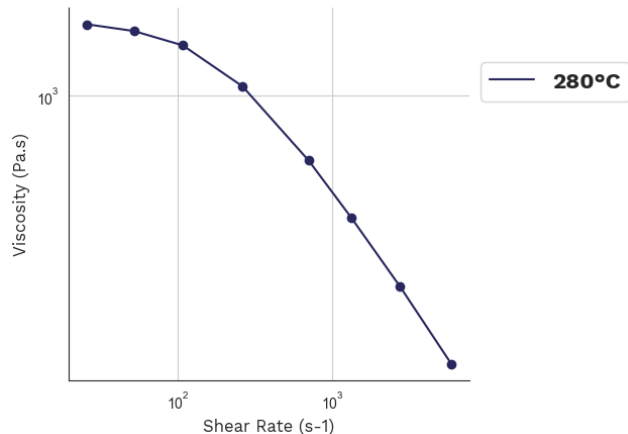


**Shearstress-shear rate**  
Rilsan® Clear G170 MED

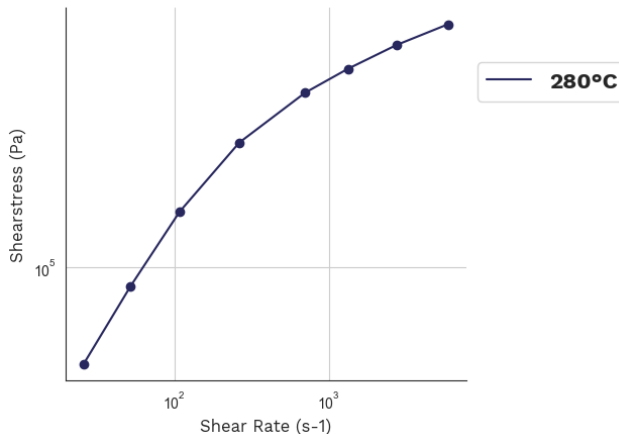

**Stress-strain**  
Rilsan® Clear G170 MED

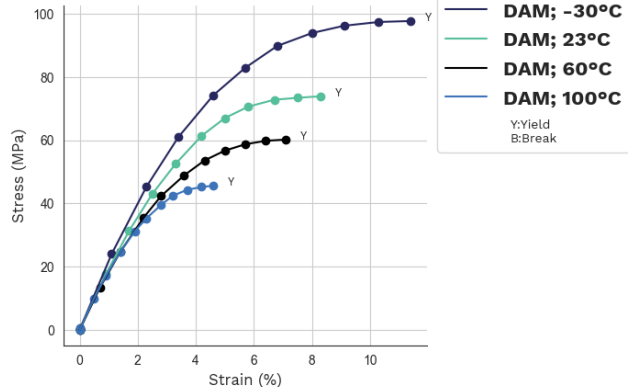

**Dynamic Shear modulus-temperature**  
Rilsan® Clear G170 MED

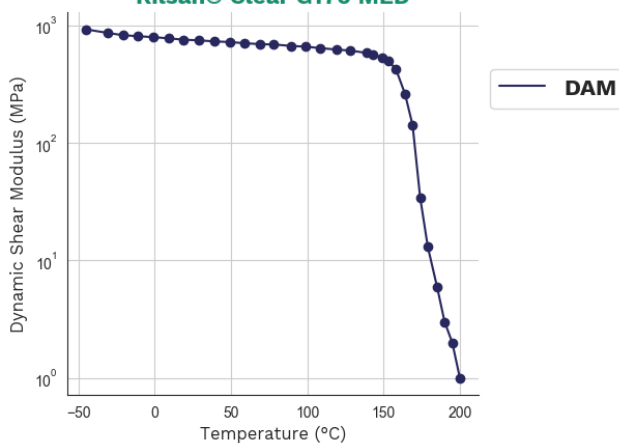

**Headquarter: Arkema France**  
420, rue d'Estienne d'Orves  
92705 Colombes Cedex – France  
T +33 (0)1 49 00 80 80

Disclaimer - Please consult Arkema's disclaimer regarding the use of Arkema's products on <https://www.arkema.com/global/en/products/product-safety/disclaimer/> which is incorporated herein by reference and made a part hereof.

Arkema France, a French société anonyme registered at the Trade and Companies Register of Nanterre under the number 319 632 790

arkema.com

**ARKEMA**