

TECHNICAL DATA SHEET

RILSAN® HT CZM 30 BLACK TLD

POLYPHTALAMIDE PELLET

RILSAN® HT CZM 30 BLACK TLD is a polyphthalamide. It is partially produced from a renewable & sustainable source (castor oil). This glass-reinforced grade is formulated and designed for injection molding in very demanding applications (high temperature or chemical resistance). It is specially used as a substitute to polyamide 12 for fittings & quick-connector body as it can be injected in same mold (same shrinkage).

Designation : ISO 16396 - PA10T/X, GF30, M1G1HL, C16-090

DESIGNATION

PA10T/X-GF33

DELIVERY FORM

- Pellets

TRANSFORMATION PROCESSES

- Injection Molding

ADDITIVES

- Heat Stabilized
- Light Stabilized
- Release agent

RHEOLOGICAL PROPERTIES

속성	값	테스트 표준
Melt volume flow rate (MVR), 300°C / 2.16kg (572°F / 4.4 lb)	15 cm³/10min	ISO 1133
Shrinkage, Parallel (t+24h)	0.3 %	ISO 294-4
Shrinkage, Normal (t+24h)	1.0 %	ISO 294-4

MECHANICAL PROPERTIES

속성	DRY / COND VALUE*	테스트 표준
Tensile modulus, 23°C (73°F), 1 mm/min	8700 / 8700 MPa	ISO 527-1/-2
Stress at break, 23°C (73°F), 50 mm/min	150 / - MPa	ISO 527-1/-2
Nominal strain at break, 23°C (73°F), 50 mm/min	2.6 / - %	ISO 527-1/-2
Charpy unnotched impact strength, 23°C (73°F)	57 / - kJ/m2	ISO 179 1eU
Charpy unnotched impact strength, -30°C (-22°F)	54 / - kJ/m2	ISO 179 1eU
Charpy notched impact strength, 23°C (73°F)	- / 9.1 kJ/m2	ISO 179 1eA
Charpy notched impact strength, -30°C (-22°F)	- / 7.4 kJ/m2	ISO 179 1eA

*DRY: Dry As Molded (DAM) if pellet / Dry if powder.
COND: Conditionned.

RILSAN® HT CZM 30 BLACK TLD

속성	값	테스트 표준
Heat deflection temperature, 0.45 MPa	240 °C	ISO 75-1/-2
Heat deflection temperature, 1.8 MPa	220 °C	ISO 75-1/-2
Melting temperature, 10°C/min	255 °C	ISO 11357-1/-3

OTHER PROPERTIES

속성	값	테스트 표준
Bio-based carbon content, Measured	68 %	ASTM D6866
Moisture absorption, At equilibrium at 23°C (73°F) / 50%HR	0.2 %	ISO 62
Water absorption, 23°C (73°F), immersion, equilibrium	1.1 %	ISO 62
Specific gravity, 23°C (73°F)	1.3 g/cm ³	ISO 1183-1

PACKAGING

This grade is delivered dried in sealed packaging ready to be processed. Available packaging:

- 26 kg / 55 lb bags

SHELF LIFE

Two years from the date of delivery, when stored properly (sealed bags, appropriate moisture, UV protection and temperature). For any use above this limit, please refer to our technical services.


PROCESSING CONDITIONS:

- Typical melt temperature (Min / Recommended / Max) - Injection Molding: 270°C / 290°C / 310°C (520°F / 555°F / 590°F)
- Typical mold temperature - Injection molding: 90-110°C (195-230°F)
- Drying time and temperature: 80-90°C (175-195°F) / 4-6 hours



SPECIAL CHARACTERISTICS

- Bio-based

DIAGRAMS

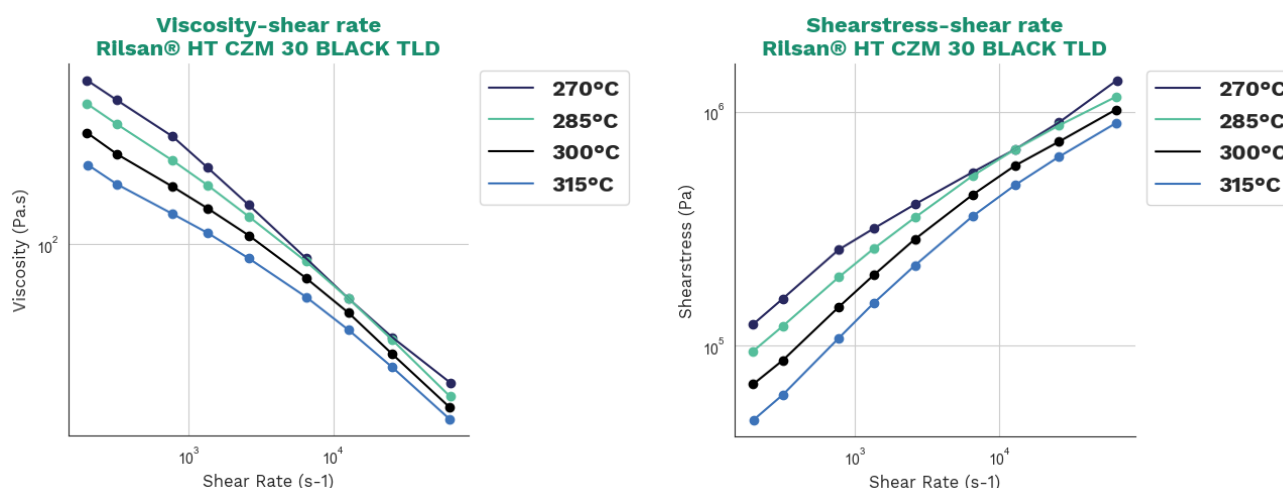

RILSAN® HT CZM 30 BLACK TLD

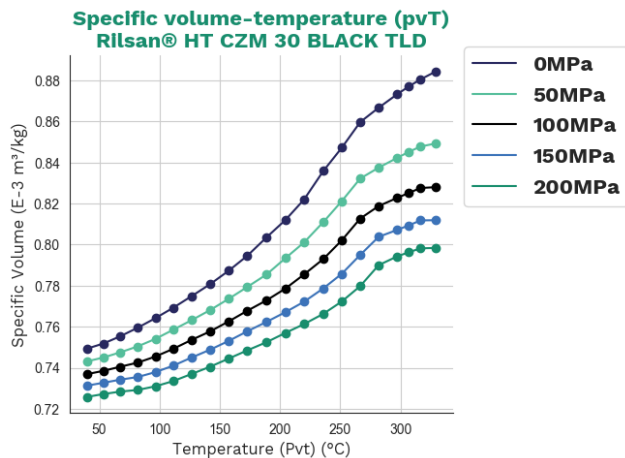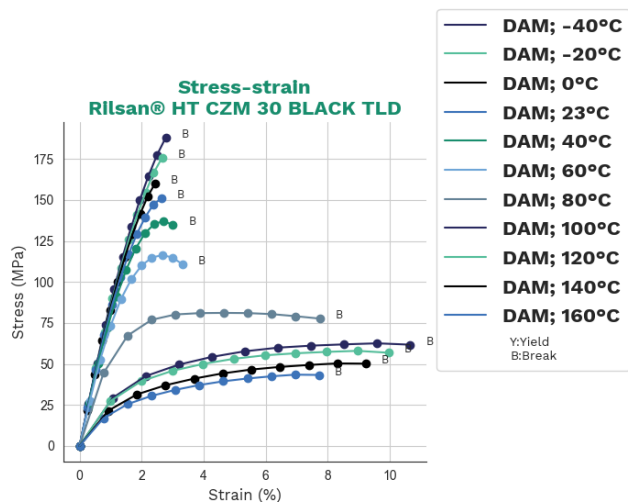

Headquarter: Arkema France
420, rue d'Estienne d'Orves
92705 Colombes Cedex – France
T +33 (0)1 49 00 80 80

Disclaimer - Please consult Arkema's disclaimer regarding the use of Arkema's products on <https://www.arkema.com/global/en/products/product-safety/disclaimer/> which is incorporated herein by reference and made a part hereof.
Arkema France, a French société anonyme registered at the Trade and Companies Register of Nanterre under the number 319 632 790

arkema.com

ARKEMA