

TECHNICAL DATA SHEET

RILSAN® MB 3000 NAT

POLYAMIDE 11 PELLET

RILSAN® MB 3000 NAT is a polyamide 11 compound. It is produced from a renewable & sustainable source (castor oil). This natural grade is designed for injection molding and is classified as Halogen Free Flame Retardant (HFFR). It combines very high flexibility with good impact resistance.

DESIGNATION

PA11-(FR)

MAIN APPLICATIONS

- Battery - Others Energies
- Oil And Gas - Others
- HHB - Others
- Cable
- Accessories
- Industry - Others
- Industry - Distribution
- Antistatics
- Auto - Others Injection
- Rotomolding
- Heavy Truck H2 & Gas Lines And Tanks

DELIVERY FORM

- Pellets

TRANSFORMATION PROCESSES

- Injection Molding

ADDITIVES

- Flame retarding agent
- Heat Stabilized
- Light Stabilized

RHEOLOGICAL PROPERTIES

プロパティ	価値	テスト基準
Melt volume flow rate (MVR), 235°C / 2.16 kg (455°F / 4.4 lb)	95 cm ³ /10min	ISO 1133
Shrinkage, Parallel (t+24h)	1.0 %	ISO 294-4
Shrinkage, Normal (t+24h)	1.1 %	ISO 294-4

RILSAN® MB 3000 NAT

MECHANICAL PROPERTIES

プロパティ	DRY / COND VALUE*	テスト基準
Hardness, Shore D, 15 s	- / 69	ISO 868
Charpy unnotched impact strength, 23°C (73°F)	- / 83 kJ/m ²	ISO 179 1eU
Charpy unnotched impact strength, -30°C (-22°F)	- / 38 kJ/m ²	ISO 179 1eU
Nominal strain at break, 23°C (73°F), 50 mm/min	> 50 / > 50 %	ISO 527-1/-2
Yield strain, 23°C (73°F), 50 mm/min	5 / 5 %	ISO 527-1/-2
Yield stress, 23°C (73°F), 50 mm/min	45 / 45 MPa	ISO 527-1/-2
Flexural modulus, 23°C (73°F)	- / 1140 MPa	ISO 178
Tensile modulus, 23°C (73°F), 1 mm/min	- / 1830 MPa	ISO 527-1/-2
Charpy notched impact strength, 23°C (73°F)	- / 4 kJ/m ²	ISO 179 1eA
Charpy notched impact strength, -30°C (-22°F)	- / 3 kJ/m ²	ISO 179 1eA

*DRY: Dry As Molded (DAM) if pellet / Dry if powder.
COND: Conditionned.

THERMAL PROPERTIES

プロパティ	価値	テスト基準
Yellow card available	yes	
Melting temperature, 10°C/min	189 °C	ISO 11357-1/-3

ELECTRICAL PROPERTIES

プロパティ	DRY / COND VALUE*	テスト基準
Surface resistivity, 23°C (73,4°F)	- / >1E15 ohm/sq	IEC 62631-3-2
Volumic (transversal) resistivity, 23°C (73,4°F)	- / >1E13 ohm/m	IEC 62631-3-1
Comparative tracking index, 23°C (73,4°F)	- / 600	IEC 60112
Dielectric stress, 23°C (73,4°F)	- / 28	IEC 60243-1
Relative permittivity, 100Hz	- / 3	IEC 60250
Relative permittivity, 1Mhz	- / 3	IEC 60250
Dissipation factor, 100Hz	- / 221	IEC 60250
Dissipation factor, 1Mhz	- / 221	IEC 60250

*DRY: Dry As Molded (DAM) if pellet / Dry if powder.
COND: Conditionned.

RILSAN® MB 3000 NAT

OTHER PROPERTIES

プロパティ	価値	テスト基準
Moisture absorption, At equilibrium at 23°C (73°F) / 50%HR	0.6 %	ISO 62
Water absorption, 23°C(73°F), immersion, equilibrium	2 %	ISO 62
Specific gravity, 23°C (73°F)	1.09 g/cm ³	ISO 1183-1

包装

This grade is delivered dried in sealed packaging ready to be processed. Available packaging:

- 25 kg / 55 lb bags

賞味期限

Two years from the date of delivery, when stored properly (sealed bags, appropriate moisture, UV protection and temperature). For any use above this limit, please refer to our technical services.



PROCESSING CONDITIONS:

- 典型的な溶融温度 (最小 / 推奨 / 最大) - 射出成形: 250°C / 270°C / 290°C (480°F / 520°F / 555°F)
- 典型的な金型温度 - 射出成形: 40-90°C (105-195°F)
- Drying time and temperature: 80-90°C (175-195°F) / 4-6 hours



SPECIAL CHARACTERISTICS

- Bio-based
- Halogen Free Flame Retardant (HFFR)

DIAGRAMS

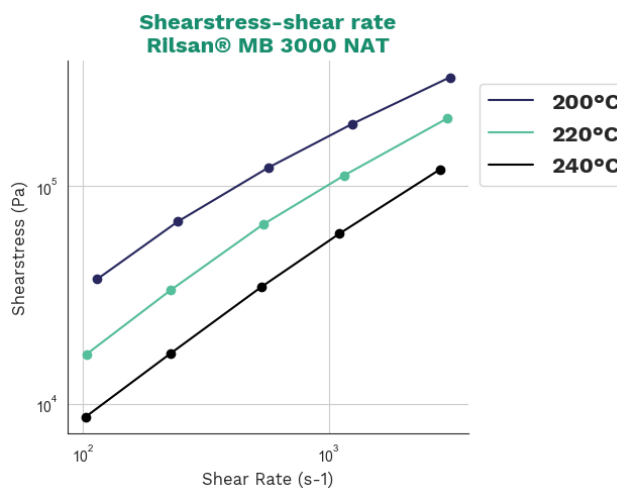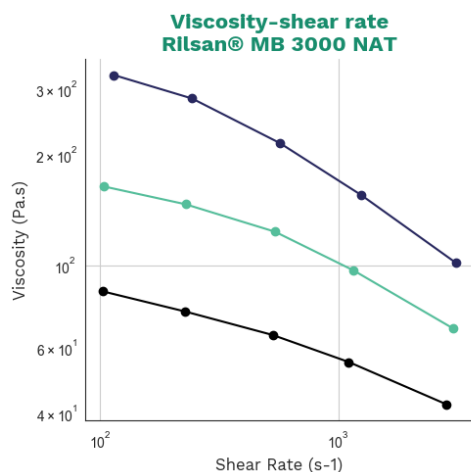

RILSAN® MB 3000 NAT

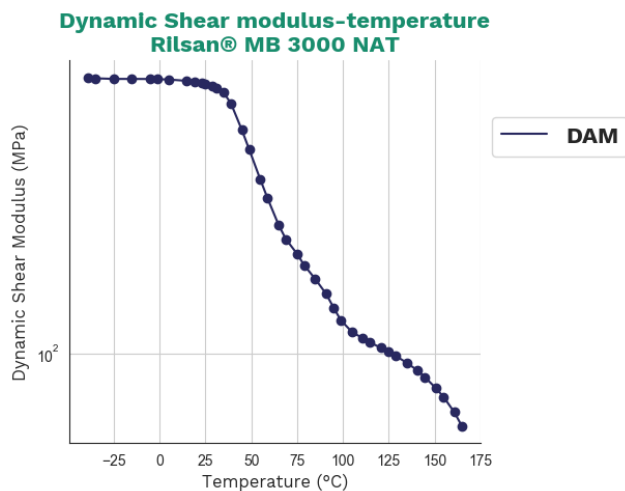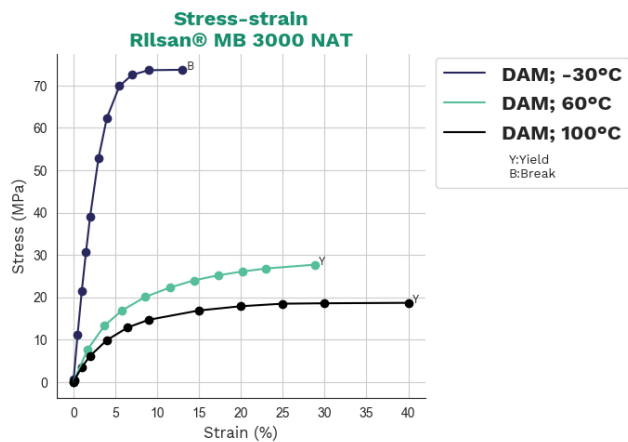

Headquarter: Arkema France
420, rue d'Estienne d'Orves
92705 Colombes Cedex – France
T +33 (0)1 49 00 80 80

Disclaimer - Please consult Arkema's disclaimer regarding the use of Arkema's products on <https://www.arkema.com/global/en/products/product-safety/disclaimer/> which is incorporated herein by reference and made a part hereof.
Arkema France, a French société anonyme registered at the Trade and Companies Register of Nanterre under the number 319 632 790

arkema.com

ARKEMA