


ARKEMA

KYNAR[®]
ADX

Powder Coating Solutions
with Kynar[®] ADX
Fluoropolymer

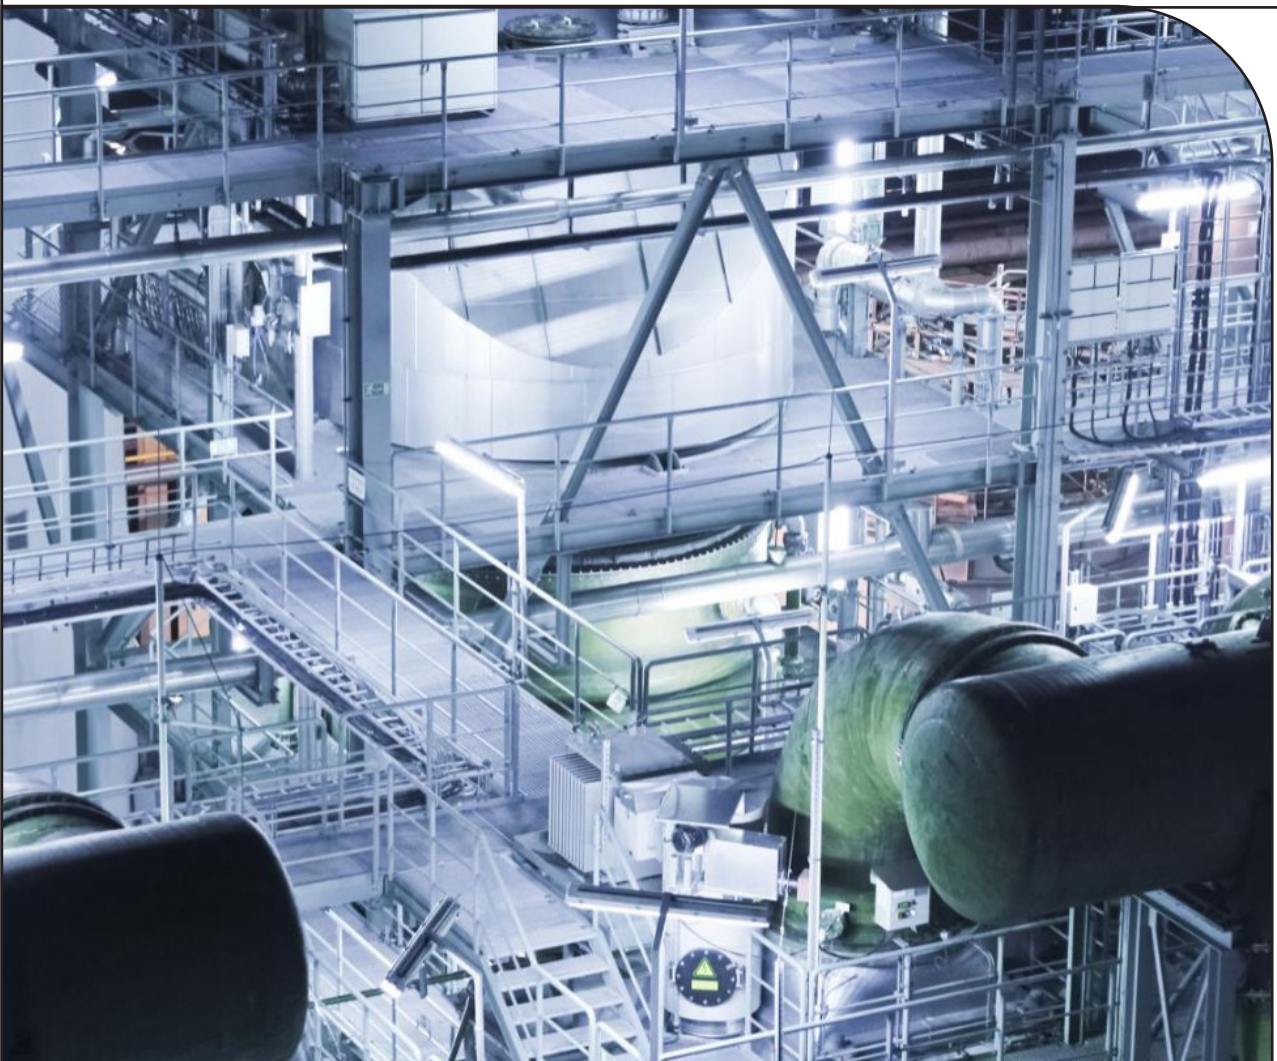

KYNAR® ADX FLUOROPOLYMER POWDER COATINGS FOR THE MOST SEVERE CHEMICAL ENVIRONMENTS

KEY BENEFITS

Outstanding Characteristics:

- Chemical resistance
- Imperviousness to UV
- High barrier properties
- High purity
- Good mechanical & thermo-mechanical properties

TWO VERSIONS AVAILABLE:

Kynar® ADX Flex 281
(Natural)

Kynar® ADX Flex 281 G
(RAL 6009)

Ease of use for various application modes:

- Direct adhesion to metal substrates (steel, aluminum, copper) after standard surface preparation
- Dip coating in fluidized bed, Electrostatic spraying, Hot spraying

TECHNICAL PROPERTIES

Powder Properties		
Nature	PVDF	ISO 1043
Particle Size Distribution		
Median Size (D50)	88.5 µm	
< 40 µm	16.9 %	ISO 13320
> 250 µm	6.1%	
Tapped Density	0.957	ISO 1068
Melting point	152°C	ISO 1218
Coating Properties		
Colour	Green (RAL 6009)	-
Density	1,72 g/cm3	ISO 1183
Recommended thickness	500 µm	
Covering efficiency	0.8 kg/m2 at 500 µm thickness	
Water absorption to saturation, 23°C/50%RH	< 0.10%	ISO 62/1
LOI	43%	ASTM D 2863
Burning rate UL94	V-0	UL 94
Shore D Hardness	75	ISO 868
Persoz Hardness	207	ISO 1522
Coefficient of Friction on Carbon Steel :		
- Static	Ks = 0,545	ASTM D 1894-14
- Dynamic	Kd = 0,482	
Coefficient of Friction on Stainless Steel :		
- Static	Ks = 0,405	ASTM D 1894-14
- Dynamic	Kd = 0,300	
Abrasion, Taber CS-17 1000g:pad	35.5 mg / 1000 cycles	ISO 9352
Impact resistance	2,5 J	ASTM G 14
UV Resistance - 2000 hs		
Adhesion	4/4	
ΔE	17,2	ISO 11507 (method A)
Gloss 60° Retention	95%	
Salt Spray - 2000 hs	Good adhesion after 2000h	ISO 9227

CHEMICAL COMPATIBILITY

Kynar ADX Flex® grades show outstanding chemical resistance, imperviousness to UV, high barrier properties, high purity, good mechanical and thermo-mechanical properties.

Substance	Conc.	20°C	50°C	80°C
Water		→		
HCl	5%	→		
HCl conc.	37%	→		
H ₂ SO ₄	10%	→		
H ₂ SO ₄ conc.	98%	→		
HNO ₃	53%	→		
Sodium Hypochlorite (ph 13)	34%	→		
NaOH	10%	→		
H ₂ O ₂	30%	→		
Perchloroethylene	30%	→		
Toluene	100%	→		
Chlorobenzene	100%	→		
Chlorine (gas)	100%	→		
Br ₂	100%	→		

For higher temperatures, or for any question related to chemical compatibility, please contact Arkema technical staff for assessment.

Temperature (°C)	Thickness (µm)	Permeation to water (g/day. m ²)
50	300	7,5
50	600	4,2
80	300	66
80	600	38

PERMEATION

The comonomer used to synthesize the **Kynar Flex**® grades is hexafluoro-propene (HFP) which is a completely fluorinated molecule. Thus, the major factor responsible for the outstanding chemical resistance of Kynar® PVDF is not changed by the incorporation of a comonomer.

The reduced cristallinity results in an enhancement of permeation rates at temperatures above 55°C.

Higher permeation can be compensated by higher thickness

PROCESS

Fluid Bed Dipping of Kynar® ADX powder

Surface preparation:

Degreasing

Pretreatment: grit-blasting (G17 steel grit typical) or chemical etching

NO PRIMER REQUIRED

Preheating conditions:

The preheating time and temperature depend on design and metal thickness and coating thickness target:


- from 4 to 10 min. at 340 - 360°C for thin parts

- up to 30 min. at 300 - 340°C for massive parts

Dipping conditions:

- Operate in well ventilated area with air exhaust near the top of the tank
- Surface temperature of the hot part should not exceed 350°C for contact with Kynar® ADX
- Hot part dipped into fluidized powder for 2 – 6 sec. typically

Principle of the fluid bed dip coating process:

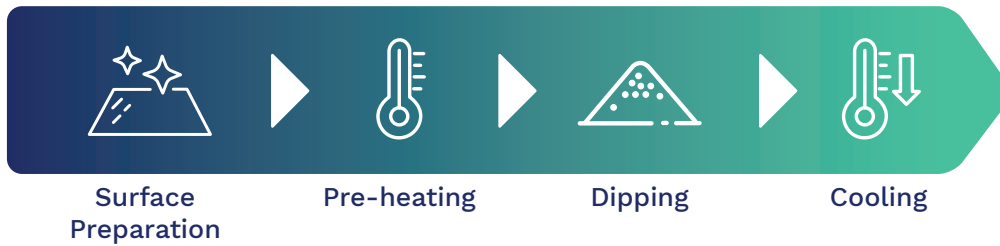

Coating thickness

From 200µm to 500µm
(or even higher for massive parts)

Hot spraying of Kynar® ADX powder

Surface preparation:

- Degreasing
- Pretreatment: grit-blasting (G17 steel grit typical) or chemical etching
- **NO PRIMER REQUIRED**

Fusion Conditions:

- Up to 10-15 min. at 240-270°C depending on thickness and nature of metal
- In oven with good ventilation (air speed < 3 m/sec.)


Powder Spraying:

Negative (-80V to -100V typical) or positive voltage can be used

Post Fusion (optional):

Up to 10-15 min. at 220°C

Principle of the hot spraying process:

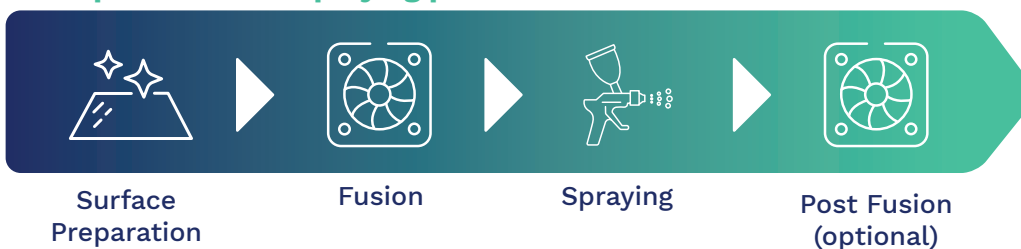

Coating thickness

- From 200 µm to 300µm per application
- Additional layers can be applied in similar conditions



EASY TOUCH-UP PROCEDURE

A quick and simple touch-up procedure is available for repairing small damaged areas.

* For any question related to chemical compatibility or the above table, please contact Arkema technical staff for assessment.



Arkema Inc.

900 1st Ave,
King of Prussia, PA 19406,
United States

Headquarters: Arkema France

420 rue d'Estienne d'Orves
92705 Colombes Cedex
France
T +33 (0)1 49 00 80 80

Kynar® is a registered trademark of Arkema.

© 2022 Arkema Inc. All rights reserved

Disclaimer - Please consult Arkema's disclaimer regarding the use of Arkema's products on <https://www.arkema.com/global/en/products/product-safety/disclaimer/>

Arkema France, a French *société anonyme* registered at the Trade and Companies Register of Nanterre under the number 319 632 790

hpp.arkema.com

ARKEMA